



Stainless Steel AISI 304/316


Model no.:	WS885-S2-304/316	WS885-S3-304/316	WS885-S4-304/316
Nominal Size:	900 mm		
Pipe:	Stainless Steel AISI 304/316		
Membrane:	Polyurethane		
Fasteners:	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	3 mH ₂ O	5 mH ₂ O	8 mH ₂ O
Horizontal opening pressure*:	374 mmH ₂ O	402** mmH ₂ O	450** mmH ₂ O
Horizontal closing pressure*:	243 mmH ₂ O	270** mmH ₂ O	302** mmH ₂ O
Submerged opening pressure*:	191** mmH ₂ O	220** mmH ₂ O	246** mmH ₂ O
Submerged closing pressure*:	117** mmH ₂ O	134** mmH ₂ O	150** mmH ₂ O
Vertical opening pressure*:	454 mmH ₂ O	505** mmH ₂ O	555** mmH ₂ O
Vertical closing pressure*:	276** mmH ₂ O	306** mmH ₂ O	337** mmH ₂ O

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (16-20°C).

Max Flow	m/s	l/s
	4	2546

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 2 m/s

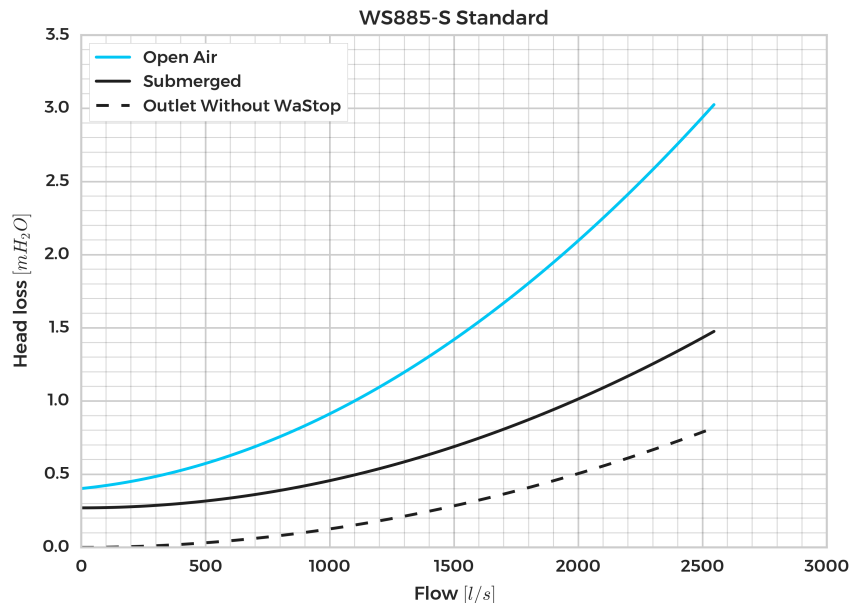

In the submerged case opening pressure [mmH₂O / inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.

Aquatic Control Engineering
 Hall Farm, Main Street,
 Rampton,
 Nottinghamshire,
 DN22 0HR

Phone: 01777 249080
Fax: 01777 249069
Email: info@aquaticcontrol.co.uk
Website: www.aquaticcontrol.co.uk
Company Registration No. 3108353